


M-HPRING vs HPRING





COMPARISON SHEET

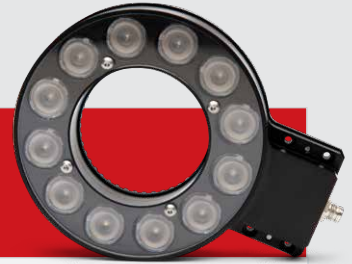

MODULAR M-HPRING



HPRING

<p>Ø 76 mm</p>	<p>INTERNAL DIAMETER</p>	<p>Ø 68 mm</p>
<p>4800K 470nm 525nm 630nm 850nm</p>	<p>COLOURS</p>	<p>5700K 470nm 525nm 630nm 850nm</p>
<p>N M W C22 </p> <p>+ Polarised versions & DO option</p>	<p>ANGLE CHANGERS</p>	<p>‘Not applicable’</p>
<p>x1.3 Brightness measured on the ring – White colour</p>	<p>CONTINUOUS MODE BRIGHTNESS</p>	<p>x1 Brightness measured on the ring – White colour</p>
<p>up to x3.6 Brightness measured on the ring – White colour</p>	<p>OVERDRIVE MODE BRIGHTNESS INCREASE</p>	<p>‘Not applicable’</p>
<p>↑ 10 µs & ↓ 25 µs</p>	<p>RESPONSIVENESS</p>	<p>↑ 1.5 ms & ↓ 1 ms</p>
<p>OV: 100% & 10V: 30%</p>	<p>DIMMING</p>	<p>‘Not applicable’</p>
<p>M12 5 pins </p>	<p>WIRING</p>	<p>M8 3 pins </p>
<p>Power & Strobe</p>	<p>LED INDICATORS</p>	<p>‘Not applicable’</p>
<p>450g Ring + Power supply</p>	<p>WEIGHT</p>	<p>310g</p>
<p>6x M5 thread points</p>	<p>MOUNTING</p>	<p>4x through holes</p>
<p>IP67 </p>	<p>IP PROTECTION</p>	<p>IP40 or IP65 OPTION</p>